



Hints from the Model Garage

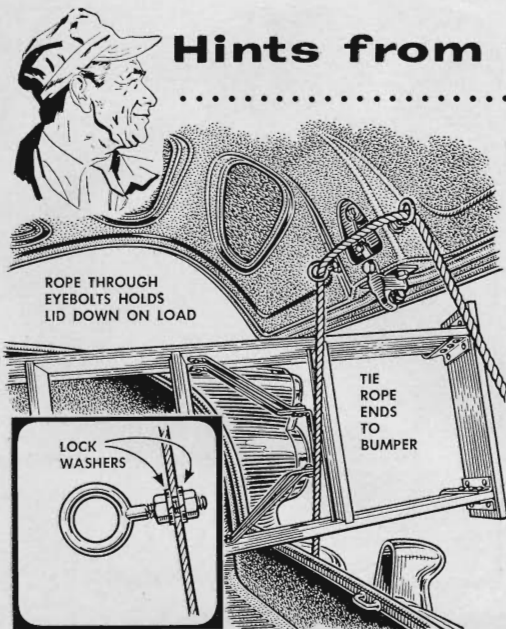

ROPE THROUGH EYEBOLTS HOLDS LID DOWN ON LOAD

TIE ROPE ENDS TO BUMPER

LOCK WASHERS

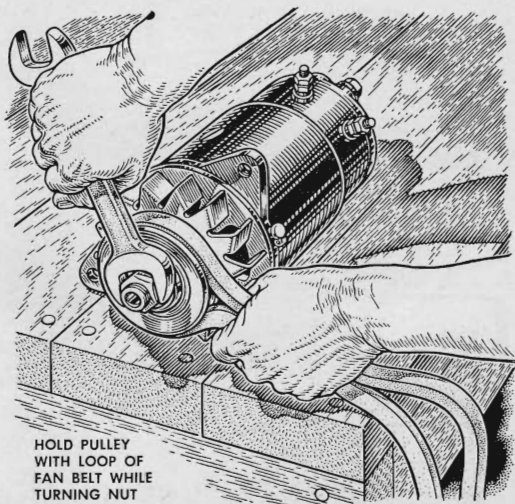

HOLD PULLEY WITH LOOP OF FAN BELT WHILE TURNING NUT

Tie the car trunk lid down on loads that hang over, by threading a rope through two eyebolts installed on the inner frame of the lid. Drill holes to fit the bolts and lock them in place with double nuts. Tie the rope to the bumper.

To remove a generator pulley without damaging it, loop the fan belt around the groove and grip it firmly while you loosen the nut. If the nut is stubborn, use an old fan belt and lock it in a vise to get a tighter grip on the pulley.



LEADING AUTO KICKS UP A SHOWER OF STONES

CLEAN AND INSPECT WIPERS OFTEN



USE WASHERS FREELY TO REMOVE MUD SPRAY THROWN BY OTHER CARS

AUTO FOLLOWING TOO CLOSELY CATCHES FLYING STONES ON WINDSHIELD


Modern windshields are expensive. Here are three ways to safeguard yours:

Use your windshield washer to flush dirty road spray thrown up by other cars, and use wipers briefly. Glass is hard, but grit particles are even harder.


Keep your distance when following another car on an unimproved road. The other fellow's tires may hurl stones or sand, marking or fracturing your glass.

Clean wiper blades often, see that they make contact and have not hardened.


More Hints from the Model Garage

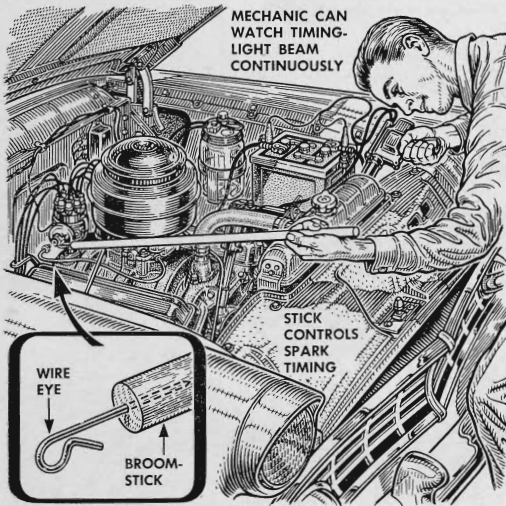


When timing an engine that has the distributor at one end and timing mark at the other, use a stick with a wire eye pressed in it to rotate the distributor body while you beam the timing light on the mark. Disconnect the vacuum line for accurate timing and slip the eye over the fitting on the diaphragm housing.

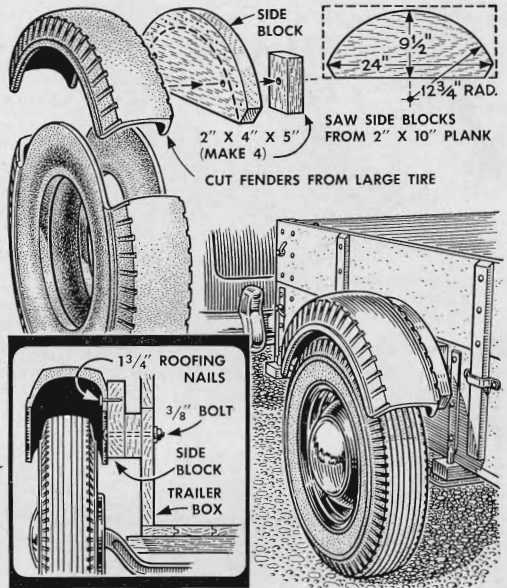

Make your own trailer fenders to keep the wheels from throwing mud all over your car. Cut segments from a truck tire (7.50 x 17 is a good size) and nail them to blocks bolted to the trailer sides. Use blocks thick enough to position the fenders over the wheels, and set the fenders high enough to allow for spring action.

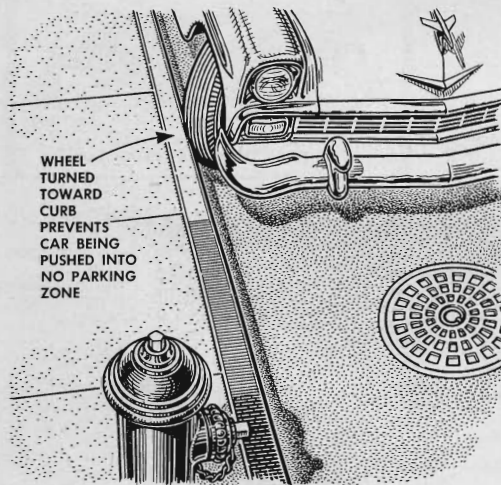

Don't let a "wise guy" push your car ahead into a fireplug area or no-parking zone to make room for his car. Turn your wheels toward the curb when near such a spot and then you'll be sure to find your car right where you left it.

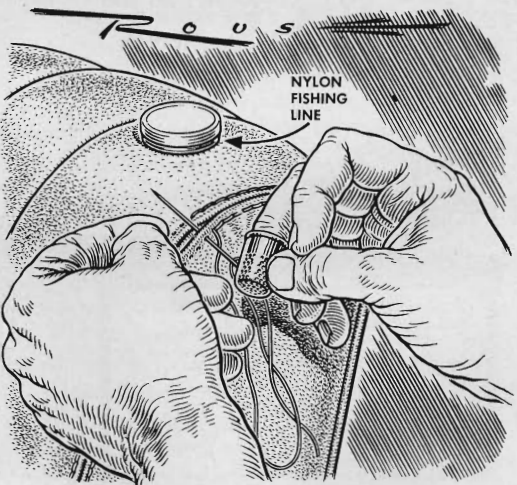

Stitch open seams in slip covers or car upholstery with nylon fishing line. It comes in several colors, and line rated at 12 to 15 lb. test is hard to break. An upholsterer's needle will make stitching seams on flat surfaces easier.