



**Tape Tightens License.** If a license plate rattles in an ornamental frame, you can make it fit snugly by placing friction tape around the edge of the plate. The tape won't be noticeable if you fold the excess over the back.



**Keep a Record of Your Paint.** If you repaint your car, it's a good idea to record the paint name and number on the underside of the trunk lid. Then if touching up is ever needed, you will find it easier to get a good match.

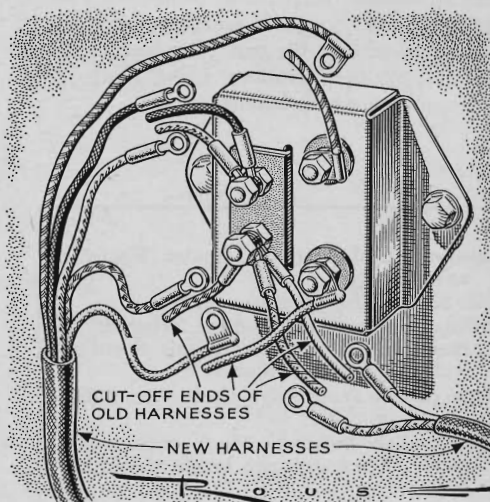

**Out With Those Old Wires.** You can install a new wire system in a car easier and faster if you first cut the old wires a couple of inches from the terminals. Then remove the old harness and install the new. Finally, use the color code on the old wire stubs as a guide in attaching the new ones. Remove one stub, then attach new wire.

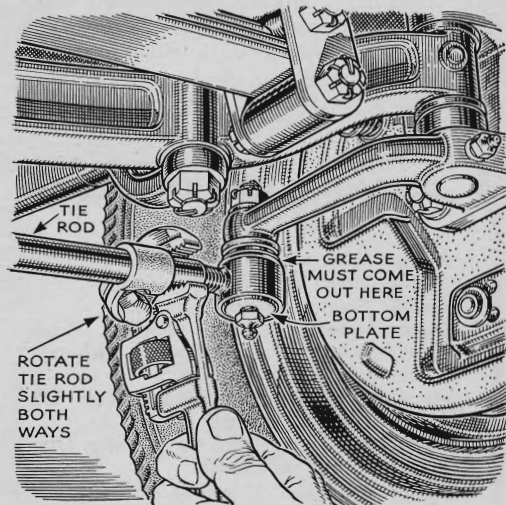

**Twisting Makes Grease Go In.** If grease does not come out at the indicated point when you are lubricating tie-rod ends, put a pipe wrench on the rod and twist it gently, first one way and then the other, until grease appears. Never force the grease too much, or you'll drive out or buckle the bottom plate, ruining the end.