



# PRACTICAL HINTS

**1 LEG PADS FOR POOCHES** that like to ride with their forepaws on the window ledge of the car door will make a dog's life pleasanter and also protect the car finish. Slit a length of 1" mailing tube and place it over the glass as shown. Raise the window slightly above the sill so the dog's toe nails will not contact the paint.—J.R.

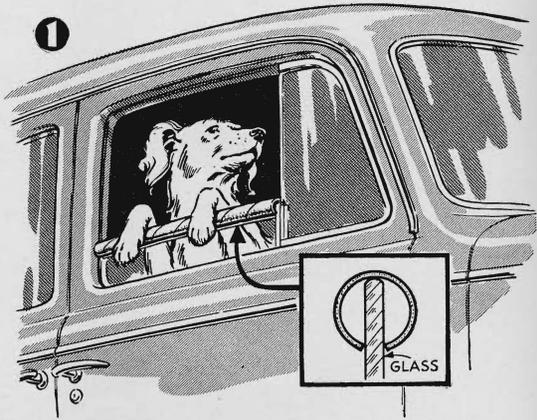

**2 NEW WINDOW-CRANK KNOBS** to replace those worn or broken off can be improvised from five-and-dime store pot-lid knobs. Remove the new bolt and replace it with a longer one on which two nuts are screwed. Insert the bolt with the knob in the hole that formerly held the pin, and tighten the nuts against the crank.—J.C.

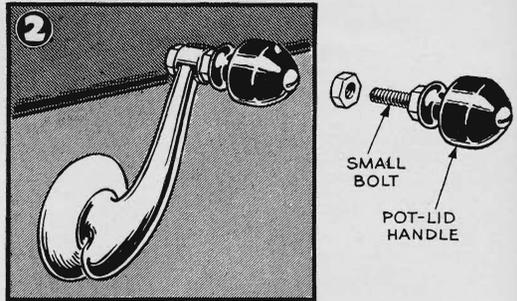

**3 TO PROTECT YOU** against getting bitten by the jaws of your alligator-type engine hood, an adjustable safety prop can be easily made from light lumber. Two pieces of 1" by 2" by 26" wood, one of them slotted part of its length, the other having two wing nuts and bolts with washers, are all the material needed. It is easily adjusted and fits all makes of cars.—L.M.

**4 STUCK WHEEL LUGS** which have been tightened too much or have rusted in place can be given an extra boost to loosen them with a pair of tire irons crossed against the lug wrench as shown in the illustration. A few drops of penetrating oil should be applied to the lug first. The method should not be used in tightening lugs, as it will set them tighter than needed.—A.R.

