





Hints From the Model Garage




Washing Job Speeded Up. You can do a better job of washing a car if a sponge is attached to the nozzle of the hose. Cut a blind hole just large enough for insertion of the nozzle. Run heavy cord through with a needle and tie to the hose.

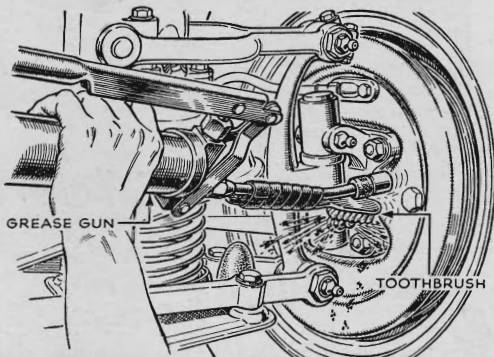

Brush Off the Fitting. An old toothbrush with stiff bristles is ideal for cleaning grease and embedded dirt from grease fittings before applying the gun. For greater working convenience, tape the handle of the brush to the nozzle of the gun.

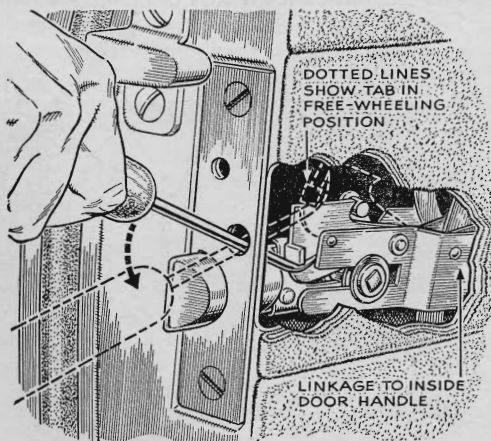

Keep Children Safe. Did you know there's a safety feature in the rear doors of General Motors four-door sedans? With a pointed tool (for instance, an ice pick with the point slightly bent), you can adjust the lock so the inside handle won't open the door. The handle is as easily returned to operation. GM introduced these locks in 1941. They've been used ever since in all models except '46, '47, and '48 Buicks.

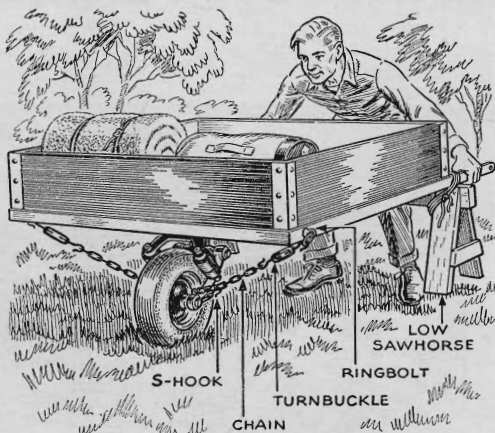

Trailer Used as Wheelbarrow. It's difficult to handle a caster-type trailer when detached from the car. F. W. Sewell, of San Mateo, Calif., overcame this by rigging his like a wheelbarrow. A ringbolt was attached to the body at each side. When the trailer is to be moved, removable chains with S-hooks in each end keep the wheel rigid. Turnbuckles tighten the chains. A sawhorse supports the trailer.